

# 11016316

The MR Modulo is an airflow regulator which ensures a stable airflow. It can be adjusted on site to control IAQ, comfort and energy savings.



MR MODULO

## PRODUCT BENEFITS

- easy to stock: just 1 product for each diameter (except 125 mm) to cover multiple airflow levels,
- low noise level,
- easy and fast to install: multiple positions and adjustments.

### Principles of operation

Using its membrane the MR Modulo maintains a constant airflow in the air supply or extract circuit. The airflow value can easily be adjusted on site using a rotating ring, to cover a wide range.

### Product description

The MR Modulo is an airflow regulator which guarantees a stable airflow whatever the pressure variation, over a wide range of values to prevent over-consumption due to excess airflow, ensure good IAQ and a high level of comfort. Its membrane technology ensures low noise levels. The nominal airflow can be adjusted on site without a tool.


### Installation

- installed directly in the duct,
- installation direction indicated on component,
- horizontal or vertical installation at any angle,
- manual and tool-free adjustment of desired airflow by removing shim and turning rotating ring,
- reserve distance with a grille, T-piece or bend: 1D on extract and 3D on air supply.

## 11016316


### Main characteristics

- plastic material (M1 fire certification),
- silicone control membrane,
- support and airtight properties using double-lip elastomer seal,
- airflow tolerance over operating pressure range:
  - Q average = Q nominal +/- 5 m3/h for MR ≤ 50 m3/h,
  - Q average = Q nominal +/- 10 % for MR > 50 m3/h,
- temperature range: -10°C / +60°C.

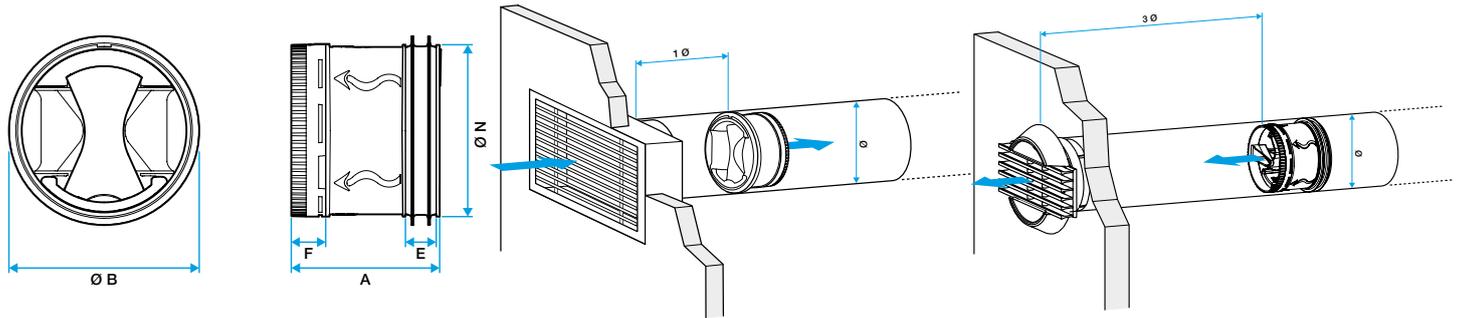

Dimensions MR Modulo


### Installation

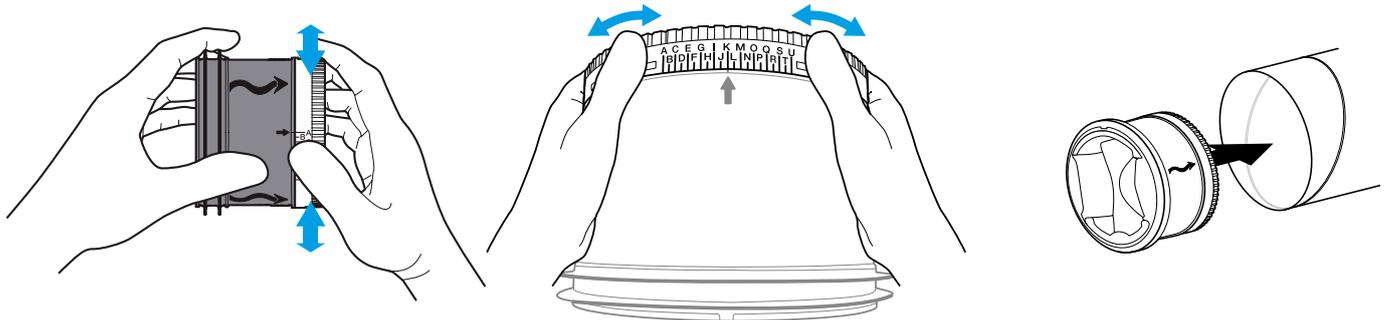


Réglage MR Modulo

Réglage MR Modulo

Installation 360°

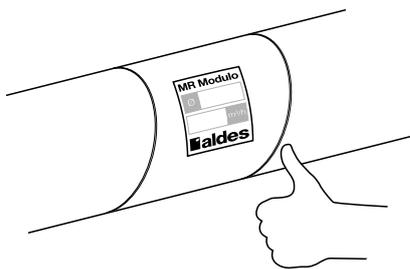

Pose de l'étiquette du MR Modulo sur le conduit

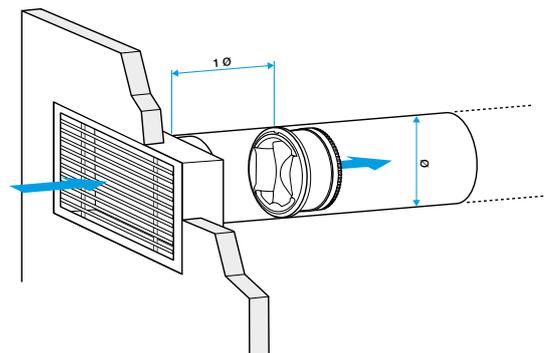

Distance de réserve à l'extraction