

Connector**11093369**
30° BEND GALVA - D355

The 30° bend is used to change the direction of a galvanised ducting system by a 30° angle.



30° bend

Product description

The 30° bend is used to change the direction of a galvanised ducting system by a 30° angle. Up to diameter 200 mm, bends are pressed; diameter 250 to 900 are sector bends.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Changes direction of ducting by 30° in non-residential and multi-occupancy residential systems

Description:


- 30° bend galvanised steel diameter 355 mm

Main characteristics

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- MO fire certification.

Dimensional data

| References | Ø (mm) |
|------------|--------|
| 11093369 | 355 |

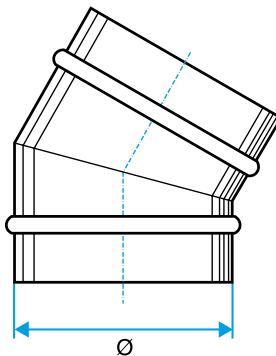

Dimensional drawing 30° bend

Connector

11093369

30° BEND GALVA - D355

Regulatory data

| References | Fire protection rating |
|------------|------------------------|
| 11093369 | M0 |