

**Connector**

## 11093392 45° BEND GALVA - D250

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle.



**Product description**

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle. Up to diameter 200 mm, bends are pressed; diameter 250 to 900 are sector bends.

**Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

**Installation**

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

**Reference arguments**

Application:

- Changes direction of ducting by 45° in non-residential and multi-occupancy residential systems

Description:

- 45° pressed bend galvanised steel diameter 250 mm

**Main characteristics**


- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

**General data**

Variants	Main material
11093392	Galvanised steel

**Dimensional data**

Variants	Ø (mm)	Ø A (mm)
11093392	250	250

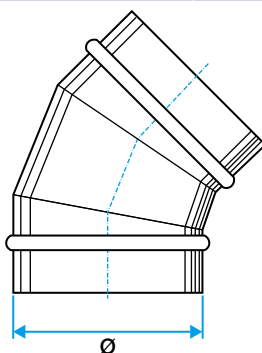

Connector

# 11093392

45° BEND GALVA - D250

Regulatory data

Variants	Fire protection rating
11093392	M0