

**Connector****11093349**  
**45° BEND GALVA - D355**

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle.



Sector 45° bend

**Product description**

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle. Up to diameter 200 mm, bends are pressed; diameter 250 to 900 are sector bends.

**Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

**Installation**

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

**Reference arguments**

Application:

- Changes direction of ducting by 45° in non-residential and multi-occupancy residential systems

Description:


- 45° bend galvanised steel diameter 355 mm

**Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

**Dimensional data**

References	Ø (mm)
11093349	355

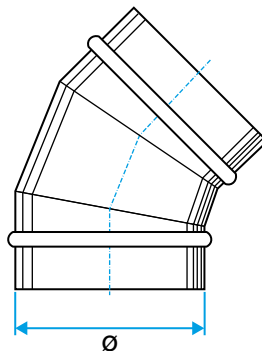

Dimensional drawing 45° bend

## Connector

# 11093349

45° BEND GALVA - D355

## Regulatory data

References	Fire protection rating
11093349	M0