

**Connector****11093352**  
**45° BEND GALVA - D500**

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle.



Sector 45° bend

**Product description**

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle. Up to diameter 200 mm, bends are pressed; diameter 250 to 900 are sector bends.

**Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

**Installation**

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

**Reference arguments**

Application:

- Changes direction of ducting by 45° in non-residential and multi-occupancy residential systems

Description:


- 45° bend galvanised steel diameter 500 mm

**Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

**Dimensional data**

| References | Ø (mm) |
|------------|--------|
| 11093352   | 500    |

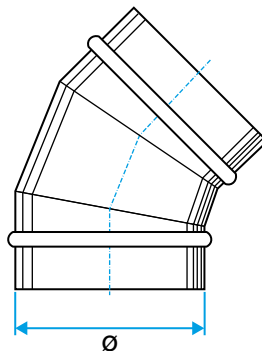

Dimensional drawing 45° bend

Connector

11093352  
45° BEND GALVA - D500

Regulatory data

| References | Fire protection rating |
|------------|------------------------|
| 11093352   | M0                     |