

Connector

11094121

45° BEND GALVA - D710

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle.



Product description

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle. Up to diameter 200 mm, bends are pressed; diameter 250 to 900 are sector bends.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Changes direction of Gas CMEV ducting by 45° in non-residential and multi-occupancy residential systems

Description:

- 45° bend aluminium diameter 710 mm

Main characteristics


- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

General data

Variants	Main material
11094121	Galvanised steel

Dimensional data

Variants	Ø (mm)	Ø A (mm)
11094121	710	710

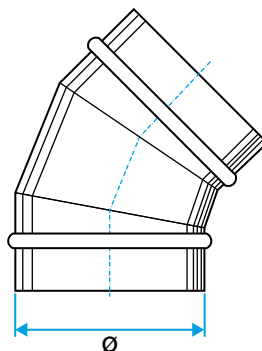

Connector

11094121
45° BEND GALVA - D710

Regulatory data

Variants	Fire protection rating
11094121	M0