

Connector**11093387****45° PRESSED BEND GALVA - D80**

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle.



Pressed 45° bend

Product description

The 45° bend is used to change the direction of a galvanised ducting system by a 45° angle. Up to diameter 200 mm, bends are pressed; diameter 250 to 900 are sector bends.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Changes direction of ducting by 45° in non-residential and multi-occupancy residential systems

Description:


- 45° pressed bend galvanised steel diameter 80 mm

Main characteristics

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

Dimensional data

References	Ø (mm)
11093387	80

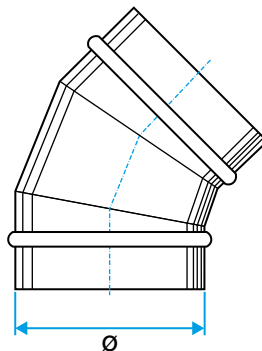

Dimensional drawing 45° bend

Connector

11093387

45° PRESSED BEND GALVA - D80

Regulatory data

References	Fire protection rating
11093387	M0