

**Connector****11093385**  
**90° BEND GALVA - D250**

The 90° bend is used to change the direction of a galvanised ducting system by a 90° angle.



Sector 90° bend

**Product description**

The 90° bend is used to change the direction of a galvanised ducting system by a 90° angle. Up to diameter 200 mm, bends are pressed; diameter 250 to 900 are sector bends.

**Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

**Installation**

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

**Reference arguments**

Application:

- Changes direction of ducting by 90° in non-residential and multi-occupancy residential systems

Description:


- 90° pressed bend galvanised steel diameter 250 mm

**Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

**Dimensional data**

References	Ø (mm)
11093385	250

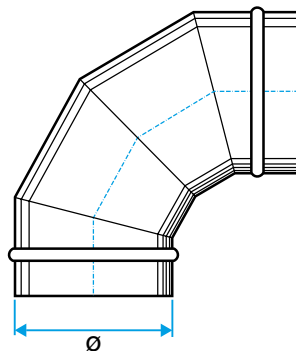

Dimensional drawing 90° bend

Connector

11093385  
90° BEND GALVA - D250

Regulatory data

References	Fire protection rating
11093385	M0