

## Connector

# 11094110

## 90° BEND GALVA - D560

The 90° bend is used to change the direction of a galvanised ducting system by a 90° angle.



### Produktbeskrivelse

The 90° bend is used to change the direction of a galvanised ducting system by a 90° angle. Up to diameter 200 mm, bends are pressed; diameter 250 to 900 are sector bends.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Changes direction of Gas CMEV ducting by 90° in non-residential and multi-occupancy residential systems

Description:

- 90° bend aluminium diameter 560 mm

### Main characteristics


- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

### General data

Variants	Main material
11094110	Galvanised steel

### Dimensional data

Variants	Ø (mm)	Ø A (mm)
11094110	560	560

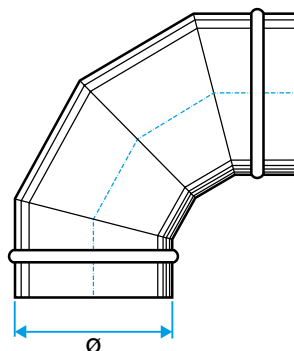

Connector

## 11094110

90° BEND GALVA - D560

Regulatory data

Variants	Fire protection rating
11094110	M0