

**Slot diffuser****11051856**  
**ALD612 1150 RAL9010 + damper**

The ALD 610 - 620 is an aluminium linear fixed slot diffuser for use on air supply or return systems in non-residential buildings.



ALD612 1150 RAL9010 + DAMPER

**PRODUCT BENEFITS**

- slim diffuser,
- built-in damper.

**Principles of operation**

The ALD 610 - 620 diffuser is installed in the ceiling using concealed attachments. It offers air supply to the left or right depending on the model. An extraction model is also available.

**Product description**

The ALD 610 - 620 is an aluminium linear fixed slot diffuser for use on air supply or extraction circuits in ventilation and air conditioning systems in commercial buildings. It delivers air supply to the left or right depending on the model. It is available with up to 4 slots in lengths of 550, 900, 1150 and 1500 mm with a 25 mm frame. Its body is made of extruded aluminium. The diffuser is equipped with extruded aluminium deflectors and a slide damper built into the diffuser. The standard finish is anodised aluminium with a natural satin hue or epoxy coating RAL 9010 white. All other RAL colours are available for another type of finish. It is installed in the ceiling using a concealed screw and bridge attachment, accessible under the diffuser. This attachment method is compatible with all types of ceiling.

**Fields of application**

Non-residential buildings

**Installation**

The ALD 610 - 620 is installed in any type of ceiling using a concealed screw and bridge attachment, accessible under the diffuser.

**Reference arguments**

- ALD 612 fixed aluminium linear supply air diffuser with 2 slots on same side.
- Length 1150 mm.
- 25 mm frame.
- Finish: aluminium body and deflector with epoxy coating RAL 9003 white.
- With built-in slide damper.
- Concealed screw + bridge attachment accessible from underside.
- Accessory: connection plenum.

**Main characteristics**

- aluminium linear slot diffuser,
- air supply or extraction,
- air supply to the left or right depending on the model,
- up to 4 slots in lengths 550, 900, 1150 and 1500 mm,
- anodised aluminium body and deflectors, natural satin hue,
- finish:
  - standard epoxy coating RAL 9010 white,
  - epoxy coating all other RAL colours.
- slide damper built into diffuser,
- concealed screw attachment in the connection plenum, accessible under the diffuser,
- plenum fitted with tabs for attachment to concrete slab.

**Supplementary characteristics**

- accessories:
  - galvanised steel plate connection plenum with standard or insulated side branch connection.

**General data**

References	Number of slots	Type of finish
11051856	2	White


Slot diffuser

## 11051856


ALD612 1150 RAL9010 + damper

Dimensional data

References	B (mm)	G (mm)	H (mm)	L (mm)	Ø D (mm)
11051856	155	67	50	1150	125

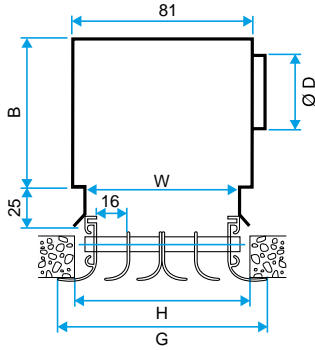

Diffuseur ALD 610 - 620

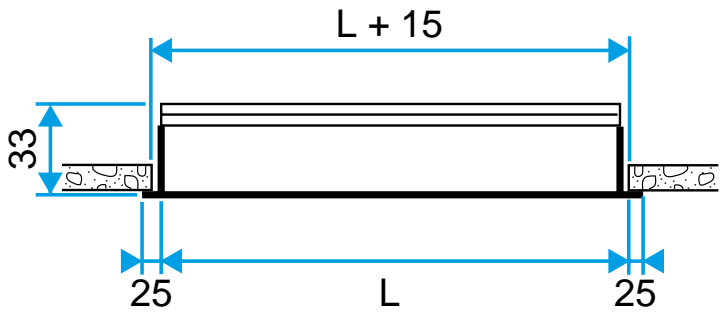

Diffuseur ALD 610 - 620

Airflow data

References	Comfort airflow < 35 dB(A) (m³/h)
11051856	175