

Ceiling grille, Ceiling grille

11002606

AU124

The AU 124 aluminium ceiling grille enables air extraction on all ventilation and air-conditioning systems.



AU 124 grille

PRODUCT BENEFITS

- easy to install: dimensions suited to 600x600 mm suspended ceiling tiles,
- high rigidity due to slim frame.

Principles of operation

The AU 124 slim frame grille with 15x15 mm square mesh at a 45° incline enables good air extraction in the place of a suspended ceiling tile.

Product description

The AU 124 slim frame grille has a 15x15 mm square mesh, inclined at 45°. It is installed in the place of a suspended ceiling tile.

Fields of application


New, Refurbishment, Non-residential buildings

Installation

- installed in place of suspended ceiling tile,
- gravity attachment on T-bar frame.

Main characteristics

- slim frame 5 mm,
- square mesh 15 x 15 mm with 45° incline,
- aluminium with epoxy paint RAL 9003 white 30%,
- dimensions from 100 x 100 to 1200 x 600 mm with increments of 25 mm in length & height for the extended range.

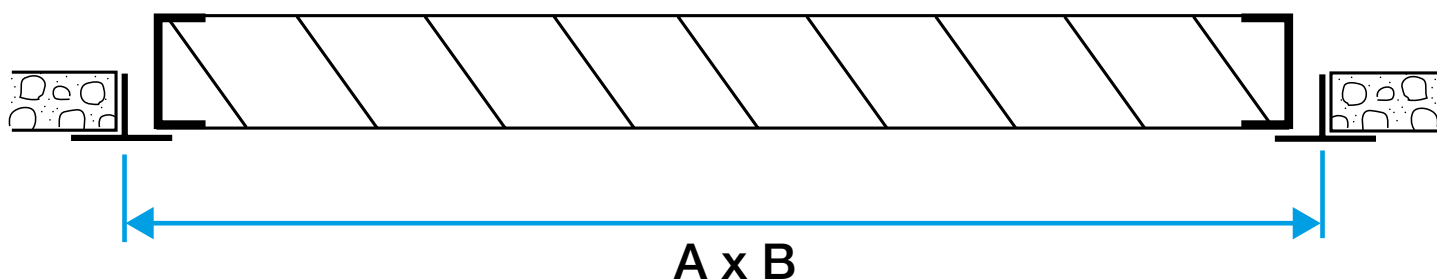

Grille AU 124