


Plastic ductwork accessory

11044406

Adapter OPTONE® 1flap-2flap



Product description

OPTONE-H + Grille and OPTONE 1f-2f adapters are designed to install respectively the OPTONE-H + Grille and OPTONE 1f-2f smoke control dampers. They enable a robust installation and easy fitting and removal of the damper throughout the building lifetime.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- adapter OPTONE-H+ grille:
 - damper attached to adapter using screws,
 - suitable for installation in concrete and on light material e.g. Promatect, Supalux or Tecniver, etc.
- Adapter OPTONE 1f-2f:
 - damper attached to adapter using screws,
 - designed for installation on any type of material.

Main characteristics


- adapter OPTONE-H+ grille:
 - galvanised steel 20/10,
 - drilled on the top and side for passage of cables,
 - fitted with sealing tabs and holes for damper attachment screws,
 - reversible top/bottom,
 - 70 mm depth for good mechanical strength.
- Adapter OPTONE 1f-2f:
 - accepts all OPTONE models,
 - reversible top/bottom,
 - 70 mm depth for good mechanical strength,
 - pre-drilled for passage of cables,
 - pre-drilled to accept damper attachment screws.

Plastic ductwork accessory

11044406 Adapter OPTONE® 1flap-2flap

Dimensional data

Variants	Lmin x Hmin (mm)	Lmax x Hmax (mm)
11044406	300 x 300	1000 x 1200

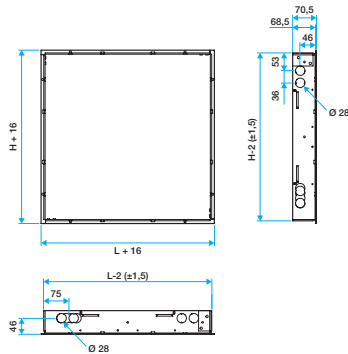

Installation

1 Entrée de câbles OPTONE mécanisme haut, ouverture gauche.

2 Entrée de câbles OPTONE mécanisme bas, ouverture droite.

3 Entrée possible à condition de percer OPTONE auparavant.

a 4 trous réservés à la fixation OPTONE

b 4 trous réservés à la fixation OPTONE + GRILLE

Pattes de scellement

H

L

85564-B

aldes

Conseil pour entrées des câbles

NE JAMAIS CONTRE PERCER LES TROUS DU CONTRE-CADRE

Marking on mounting frame