


Collective static heat exchanger

11053222

BR CIRCULAR DAMPER D250

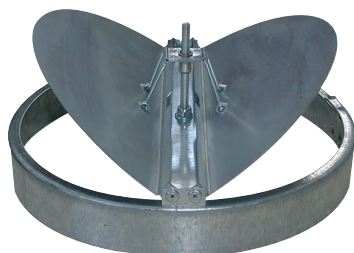

Product description

The steel circular BR damper balances airflow on circular ceiling diffusers SC 832 TP, A 842 and A 842 TP as well as square diffusers SF 704 R TP, SC 310 and SC 360.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- force-fitted in the diffuser branch connection,
- adjusted through the diffuser using a screw.

Reference arguments

- Pressed steel circular cones, fixed position.
- Steel compensation plate replacing a ceiling panel.
- Concealed screw attachment to concrete slab in diffuser neck. Note: the weight of the diffuser must not be supported by the suspended ceiling framework. Use suspension cables on page XXX.
- Direct connection to circular ducts or LRE plenum.
- Epoxy paint finish, RAL 9010 white.

Main characteristics

- butterfly type with 2 v-shaped vanes,
- steel construction,
- compatible with diffusers SC 832 TP, A 842, A 842 TP, SF 704 R TP, SC 310 and SC 360.

Dimensional data

Variants	Ø D (mm)
11053222	250

