


Collective static heat exchanger

11053225

BR CIRCULAR DAMPER D400

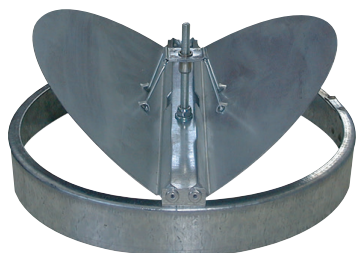

Product description

The steel circular BR damper balances airflow on circular ceiling diffusers SC 832 TP, A 842 and A 842 TP as well as square diffusers SF 704 R TP, SC 310 and SC 360.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- force-fitted in the diffuser branch connection,
- adjusted through the diffuser using a screw.

Reference arguments

- External aluminium cone and pressed steel core.
- Fast and easy worm screw system (patented) to adjust diffusion.
- RAL 9010 white epoxy paint finish or RAL 9006 aluminium.
- Concealed attachment to concrete slab using brackets fitted to diffuser (F16 attachment method).
- Direct connection to circular ducts or using the LRE plenum.

Main characteristics

- butterfly type with 2 v-shaped vanes,
- steel construction,
- compatible with diffusers SC 832 TP, A 842, A 842 TP, SF 704 R TP, SC 310 and SC 360.

Dimensional data

Variants	Ø D (mm)
11053225	400

