

Connector

11095351

C 45° BEND aluminium - D450

The aluminium 45° bend is used to change the direction of an aluminium ducting system by a 45° angle.



45° bend aluminium

PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

Product description

The aluminium 45° bend is used to change the direction of an aluminium ducting system by a 45° angle. Bends up to diameter 500 are sector bends.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Changes direction of Gas CMEV ducting by 45° in non-residential and multi-occupancy residential systems

Description:


- 45° bend aluminium diameter 450 mm

Main characteristics

- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- MO fire certification.

Dimensional data

| References | Ø (mm) |
|------------|--------|
| 11095351 | 450 |

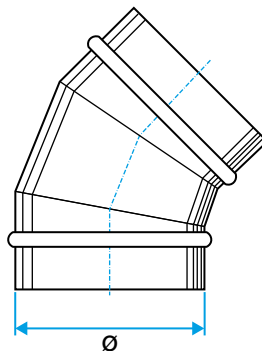

Dimensional drawing 45° bend Aluminium

Regulatory data

| References | Fire protection rating |
|------------|------------------------|
| 11095351 | MO |

Connector

11095351

C 45° BEND aluminium - D450