

## Connector

11095312  
C 90° BEND aluminium - D500

The aluminium 90° bend is used to change the direction of an aluminium ducting system by a 90° angle.



90° bend aluminium

## PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

## Product description

The aluminium 90° bend is used to change the direction of an aluminium ducting system by a 90° angle. Bends up to diameter 500 are sector bends.

## Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

## Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

## Reference arguments

Application:

- Changes direction of Gas CMEV ducting by 90° in non-residential and multi-occupancy residential systems

Description:


- 90° bend aluminium diameter 500 mm

## Main characteristics

- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- M0 fire certification.

## Dimensional data

References	Ø (mm)
11095312	500

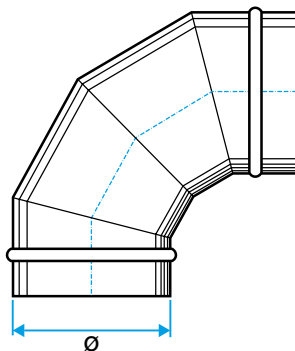

Dimensional drawing 90° bend Aluminium

## Regulatory data

References	Fire protection rating
11095312	M0

Connector

# 11095312

C 90° BEND aluminium - D500