#### Connector

## 11093739 CRE GAL D315 1-2/125

The CRE standard storey manifold is used to connect up to four 125 mm diameter ducts to the vertical riser.



Collecteur Raccord d'Etage standard

#### PRODUCT BENEFITS

or pre-fitted in factory: no risk of leaks, istall: the bottom of the CRE slides inside the duct for adjustment

### **Product description**

The CRE sealed storey manifold is used to connect up to four 125 mm diameter ducts to the vertical riser. It ensures leak-free installation without excessive pressure losses on the branch connections. The CRE sealed storey manifold is used with storey elements (2.47 m).

#### **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

#### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

#### **Reference arguments**

#### Application:

- Joins 1 or 2 connectors diameter 125 mm at 90° to vertical riser diameter 315 mm
- Ensures leak-free installation without excessive pressure loss at connections
- Ensures an airtight connection between duct connector and hose
- Complements storey elements (2.47 m)

#### Description:

• Storey manifold diameter 315 mm with 2 connectors at 90° diameter 125 mm galvanised steel

#### **Main characteristics**

- available in diameters from 125 to 630,
- height:
- h = 400 mm for  $\emptyset \le 250$ ,
- h = 415 mm for Ø ≥ 315.
- up to four Ø125 branch connections,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.






#### Connector

# 11093739 CRE GAL D315 1-2/125

#### **Dimensional data**

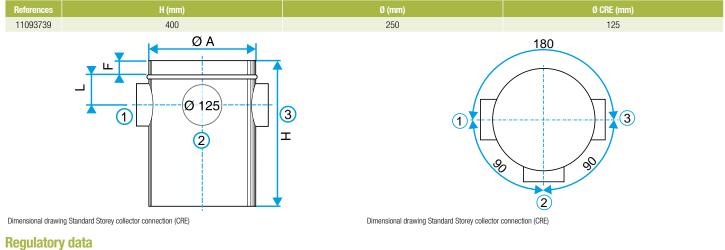

References	Fire protection rating
11093739	M0

