

The CRE standard storey manifold is used to connect up to four 125 mm diameter ducts to the vertical riser.



Collecteur Raccord d'Etage standard

PRODUCT BENEFITS
• connector pre-fitted in factory: no risk of leaks,
• easy to install: the bottom of the CRE slides inside the duct for adjustment

# **Product description**

The CRE sealed storey manifold is used to connect up to four 125 mm diameter ducts to the vertical riser. It ensures leak-free installation without excessive pressure losses on the branch connections. The CRE sealed storey manifold is used with storey elements (2.47 m).

# **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

# **Reference arguments**

Application:

- Joins 1 or 2 connectors diameter 125 mm at 90° to vertical riser diameter 400 mm
- Ensures leak-free installation without excessive pressure loss at connections
- Ensures an airtight connection between duct connector and hose
- Complements storey elements (2.47 m)

# Description:

• Storey manifold diameter 400 mm with 2 connectors at 90° diameter 125 mm galvanised steel


# **Main characteristics**

- available in diameters from 125 to 630,
- height:
- h = 400 mm for  $\emptyset \le 250$ ,
- h = 415 mm for  $\emptyset \ge 315$ .
- up to four Ø125 branch connections,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

# Connector

# 11093765 CRE GAL D400 1-2/125

# **Dimensional data**

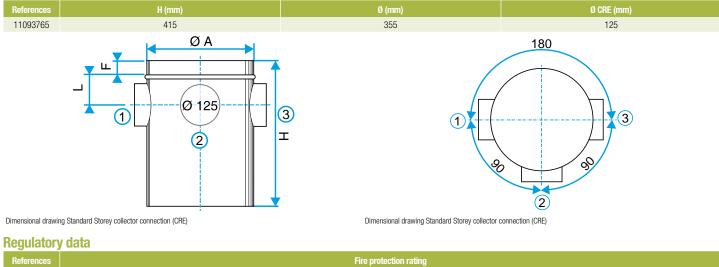

| References | S Fire protection rating |
|------------|--------------------------|
| 11093765   | MO                       |