

## 11059076 DEX3090 - surface-mounted

### General data

References	Insulation density (kg/m <sup>3</sup> )	Thickness of insulation (mm)	Motor class in accordance with IEC TS 60034-30-2	Type of motor
11059076	9	50	IE5 (Ultra Premium Efficiency)	EC

### Dimensional data

References	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	I (mm)	J (mm)	K (mm)
11059076	2206	500	1183	1577	147	926	110	315	313	259

### Airflow data

References	Minimum airflow	Max. airflow ErP (m <sup>3</sup> /h)	Max. airflow (m <sup>3</sup> /h)
11059076	150	910	910


### Thermal data

References	Max. exchanger output (%)
11059076	90

### Electrical datas

References	Frequency (Hz)	Protection rating	Max. power of electrical coil 1 (kW)	Voltage (V)	Electrical coil voltage 1	Max. power of electrical coil 2	Voltage of electrical coil 2	Maximum current – unit (A)	Maximum current – first coil (A)	Maximum current – second coil (A)
11059076	50	IP20	2,5	1x230	230	6,0	3x400	3,1	13,7	5,8

### Installation visual 1

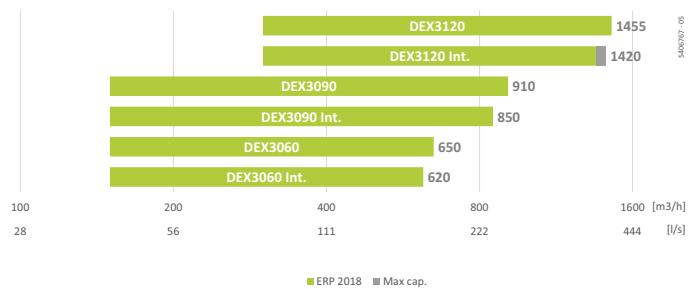

Product curves (St.: surface-mounted, Int.: semi-integrated)