

11059078

DEX3120 - surface-mounted

General data

References	Insulation density (kg/m ³)	Thickness of insulation (mm)	Motor class in accordance with IEC TS 60034-30-2	Type of motor
11059078	9	50	IE5 (Ultra Premium Efficiency)	EC

Dimensional data

References	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)
11059078	2406	600	1463	1957	123	633	627	80	400	276

Airflow data

References	Minimum airflow	Max. airflow ErP (m ³ /h)	Max. airflow (m ³ /h)
11059078	300	1455	1455


Thermal data

References	Max. exchanger output (%)
11059078	90

Electrical datas

References	Frequency (Hz)	Protection rating	Max. power of electrical coil 1 (kW)	Voltage (V)	Electrical coil voltage 1	Max. power of electrical coil 2	Voltage of electrical coil 2	Maximum current – unit (A)	Maximum current – first coil (A)	Maximum current – second coil (A)
11059078	50	IP20	3,6	1x230	3x400	9,0	3x400	4,9	4,3	8,8

Installation visual 1

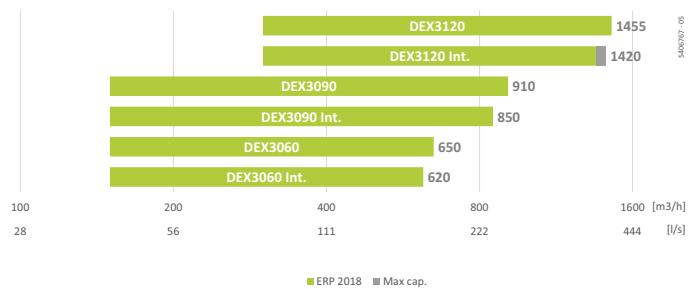

Product curves (St.: surface-mounted, Int.: semi-integrated)