


# 11034057

## EasyVEC® Standard 12000 IP VAR STR CIRC Insulated

The best-designed range of exhaust box fans on the market, making ventilation efficient, serene, and easy.

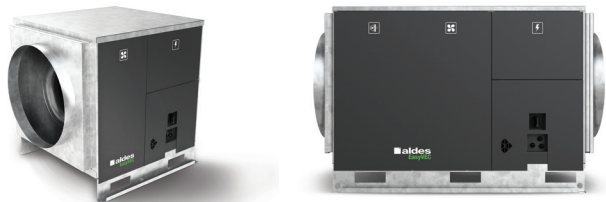

### PRODUCT BENEFITS

- wide range from 4000 to 12,000 m<sup>3</sup>/h,
- 100% recyclable.

### REGULATIONS AND COMPLIANCES

Technical Opinion no.: 14.5/16-2185\_V2

### Principles of operation

EasyVEC® Standard delivers unidirectional ventilation in commercial buildings, via air supply or exhaust.

### Product description

EasyVEC® Standard delivers unidirectional ventilation in commercial buildings by air supply or exhaust, to ensure adequate air quality and preservation of the building structure.

### Fields of application

Multi-occupancy residential housing, Refurbishment, Non-residential buildings, Mechanical extract ventilation systems

### Installation

- installation:
  - on anti-vibration slab as per DTU 68.3 recommendations,,
  - indoor or outdoor location,
  - sufficient space must be left in front of the box fan to avoid obstructing the access panel and allow maintenance of internal components.
  - for roof installation, preferably positioned out of the wind to limit pressure losses at the outlet.
- for better acoustic and aeraulic performance, we recommend that you:
  - install sound attenuators at the unit connections,
  - use the ALDES VIRTUO-FIX range of sealed accessories,
  - use MS PRO sealed flexible sleeves to muffle ductwork vibrations.

### Reference arguments

- Application:
  - centralised, very low-consumption unidirectional air supply or exhaust box fan for non-residential CMEV system,
  - new builds and refurbishment,
  - air supply /exhaust,
  - attic / equipment rooms / flat roofs,
  - indoor / outdoor.
- Description:
  - EasyVEC® Standard box fan,
  - easy to select: Selector PoWair® and Conceptor Ventilation design software,
  - easy to service: link to documentation via QR code, single access panel.

# 11034057

## EasyVEC® Standard 12000 IP VAR STR CIRC Insulated

### Main characteristics

- AC motor,
- backward curve impeller,
- galvanised panels Z275.
- multiple options and accessories:
- filter box,
- ISO coarse filter 60% ePM10 50%, ePM1 50-75%, ePM1 85%,
- filter replacement indicator,
- pressure switch.
- made in France.

### Supplementary characteristics

- compatible with technical Approval for Modulated Ventilation Presence-Agito-CO2-Humidity-controlled no. 14.5/16-2185\_V1,
- ErP 2018,
- Eligible for ESC: BAT-TH-112, BAT-TH-125, BAT-EQ-123.

### Accessories

Description	Variants
Thermal-magnetic circuit breaker 20A-25A	11057057
Duct sensor +25/+90°C	11090900
Airflow control kit (20-300 Pa)	11090901
Duct sensor -10/+35°C	11090902
Female rain hood + screen Ø710 mm	11056410
OCTA D710 sealed	11094647
MS PRO V2 D710	11094663

### Filters


Description	Variants
G4 filter EasyVEC® 10000/12000	11034411
M5 filter EasyVEC® 10000/12000	11034414
F7 filter EasyVEC® 10000/12000	11034425
F9 filter EasyVEC® 10000/12000	11034428

### General data

Variants	Type of motor
11034057	AC

### Dimensional data

Variants	EA1 (mm)	EA2 (mm)	ER1 (mm)	H (mm)	HP (mm)	HT (mm)	L (mm)	LT (mm)	M (mm)	P (mm)
11034057	552	394	522	1015	118	1183	1138	1005	50	1420

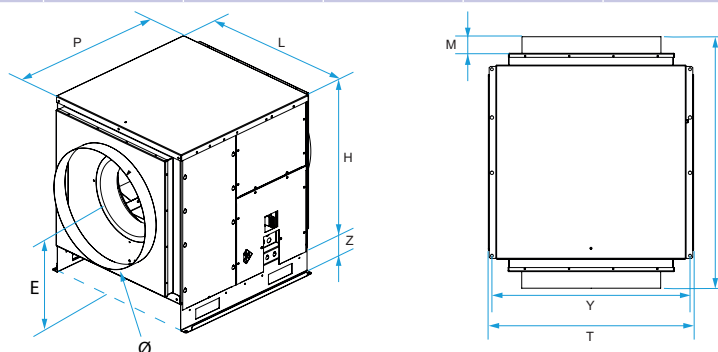

### Airflow data


Variants	Airflow (m³/h)
11034057	12000

11034057


EasyVEC® Standard 12000 IP VAR STR CIRC Insulated

**Electrical datas**

Variants	Maximum power (W)	Max. power	Max. power	Protection rating	Maximum current (A)	Power supply
11034057	3200	3,2	3200	IP24	22,1	Single-phase

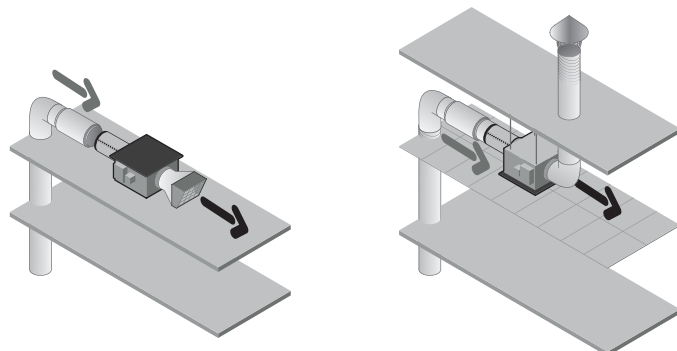**Installation**

EasyVEC-Compact

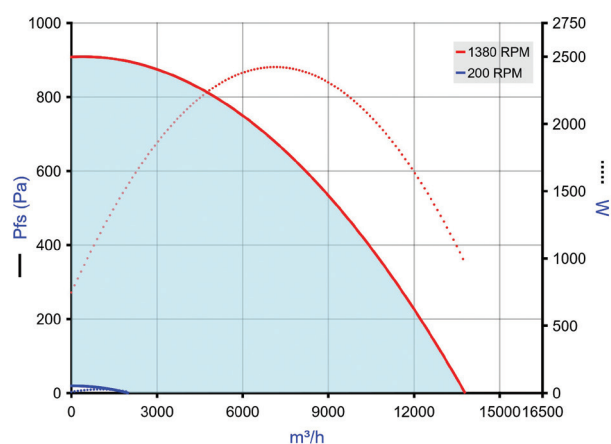**Curve**

&gt; Aerulic curves drawn up as per standard NF EN ISO 5801.

&gt; P (Pa) = static pressure.

&gt; P (W) = power consumption.

S (mm)	Y (mm)	Z (mm)	Ø (mm)	Weight (kg)
961	937	1392	710	202