

Duct grille

11050108
GD102 F1 325X75

The GD 102 indoor duct grille is used for air extraction in commercial buildings.



GD102 F1 325X75

PRODUCT BENEFITS

- suitable for circular and oblong ducts in all standard diameters.

Principles of operation

The GD 102 indoor duct grille operates on extraction for all ventilation and air conditioning systems in commercial buildings. Installed on cylindrical or oblong duct.

Product description

The GD 102 indoor duct grille is used for air extraction in all ventilation and air conditioning systems in commercial buildings. Installed on cylindrical or oblong duct. Single-deflection grille with individually adjusted movable vertical vanes, 20 mm pitch, galvanised steel with natural hue finish.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- attached to circular or oblong ducts,
- visible screw attachment in frame.

Reference arguments

- GD 102 single-deflection duct terminal with adjustable, movable vertical vanes at 20 mm pitch
- 325x75 mm
- Suited to all standard diameters of cylindrical or oblong ducts
- Used for return air
- Galvanised steel, natural finish
- Visible screw attachment in frame
- Accessory: H damper with straight slide, locking screw, clip-mounted on terminal

Main characteristics

- single deflection terminal with movable, individually adjustable vertical fins, 20 mm pitch,
- galvanised steel with natural finish,
- visible screw attachment in the frame on cylindrical or oblong duct.
- dimensions range from 325 x 75 to 1225 x 225 mm.

Accessories

Désignations	References
DUCT GRILLE DAMPER H325X75	11053959
DUCT GRILLE DAMPER N325X75	11053969

General data


References	Type of finish	Colour
11050108	Galvanised steel	Galvanised steel

Duct grille


11050108
GD102 F1 325X75

Dimensional data

References	A (mm)	B (mm)	C (mm)	H (mm)	L (mm)	Max. Ø D duct (mm)	Min. Ø D duct (mm)
11050108	42	86	124	75	325	400	160

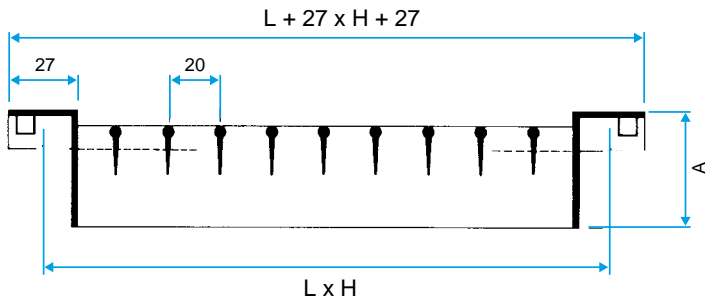

Grille GD 102 seule

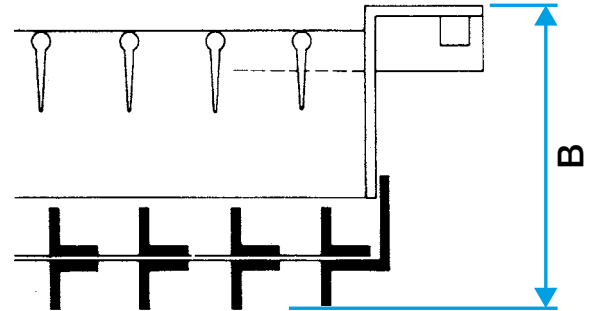

Grille GD 102 avec registre H monté

Airflow data

References	Comfort airflow (air supply with damper N 100% open) for $L_w < NR 25$ (m ³ /h)
11050108	190