

The GD 102 indoor duct grille is used for air extraction in commercial buildings.



GD102 F1 625X225

PRODUCT BENEFITS • suitable for circular and oblong ducts in all standard diameters

Principles of operation

The GD 102 indoor duct grille operates on extraction for all ventilation and air conditioning systems in commercial buildings. Installed on cylindrical or oblong duct. **Product description**

The GD 102 indoor duct grille is used for air extraction in all ventilation and air conditioning systems in commercial buildings. Installed on cylindrical or oblong duct. Single-deflection grille with individually adjusted movable vertical vanes, 20 mm pitch, galvanised steel with natural hue finish.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- attached to circular or oblong ducts,
- visible screw attachment in frame.

Main characteristics

- single deflection terminal with movable, individually adjustable vertical fins, 20 mm pitch,
- galvanised steel with natural finish,
- visible screw attachment in the frame on cylindrical or oblong duct.
- dimensions range from 325 x 75 to 1225 x 225 mm.

Accessories

Désignations	References
DUCT GRILLE DAMPER H625X225	11053957
TILTED DAMPER FOR N DUCT GRILLE 625X225	11053967


General data

References	Type of finish	Colour
11050107	Galvanised steel	Galvanised steel

Duct grille

11050107 GD102 F1 625X225

Dimensional data

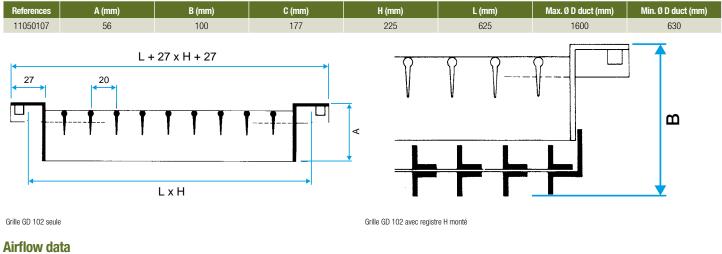

References	Comfort airflow (air supply with damper N 100% open) for Lw < NR 25 (m³/h)	
11050107	1300	