


Floor grille

11003403

GRIDLINED Floor angle 90°

GRIDLINED Floor is an aluminium fixed floor grille for indoor air supply and extraction in commercial buildings.

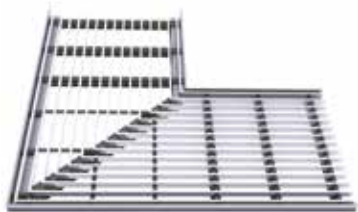

GRIDLINED FLOOR 90

PRODUCT BENEFITS

- resistant to corrosion, suitable for pool environments,
- high load strength,
- compatible with AldesArchitect range.

Principles of operation

The GRIDLINED Floor aluminium fixed floor grille operates on extraction or supply for all ventilation and air conditioning systems in commercial buildings.

Product description

GRIDLINED Floor is an aluminium fixed floor grille for indoor air supply and extraction in commercial buildings. It features a robust frame and is suitable for chlorinated atmospheres, such as swimming pools. Maximum unit dimensions of 200 x 400 mm, also available in linear (strip) version for longer distances, with or without 90° angle piece for corners. This grille is compatible with the AldesArchitect range for an elegant decorative finish.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- floor installation,
- sealing tabs built into grille frame.

Reference arguments

- 90° angle piece for Gridlined Floor floor grille.
- Enables decorative link between linear strips of Gridlined Floor in corners.
- Anodised aluminium or epoxy paint.
- Suitable for chlorinated atmospheres, such as pools

Floor grille

11003403


GRIDLINED Floor angle 90°

Main characteristics

- indoor aluminium floor grille,
- air supply or extraction in commercial buildings,
- extruded aluminium profiles,
- fixed horizontal front bars 15° deflection,
- robust frame reinforced with U-shape profiles, 5 mm visible edge,
- removable core as standard,
- grille frame supplied with sealing tabs (as standard),
- AldesArchitect finish available.

Options

| |
|---------|
| 9010 |
| DECORHC |
| PEINTHC |
| RAL1 |
| RAL2 |
| RAL4 |

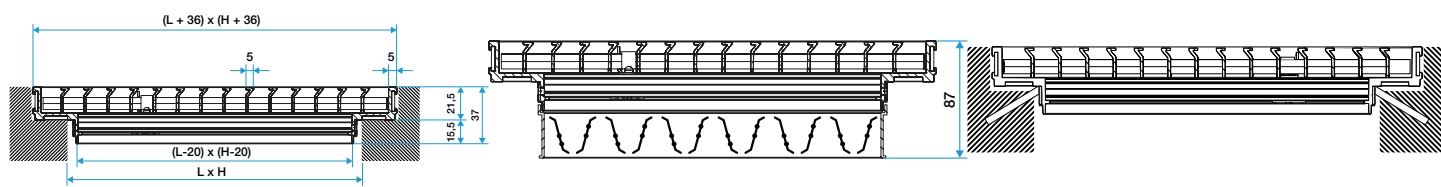

Gridlined floor

Gridlined floor avec registre monté

Gridlined floor avec ses pattes de scellement