


Air handling unit

11090248

Hot water coil 2 rows DFE+ 3000

Coil built into unit to provide additional heating or cooling to a high-efficiency heat recovery unit.

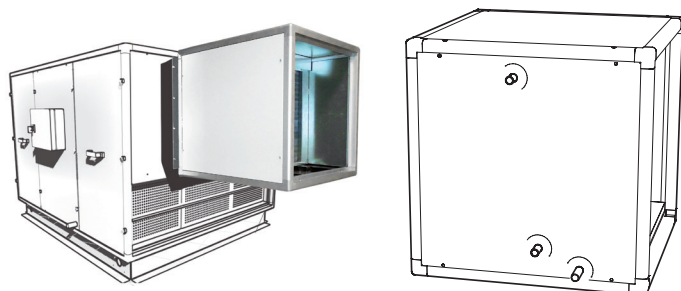

PRODUCT BENEFITS

- supplies heating/cooling properties and secures the temperature of the supplied air, for optimal comfort.

Principles of operation

Coil built into unit to provide additional heating or cooling to a high-efficiency heat recovery unit.

Product description

Coils inside units to provide additional heating or cooling to a high-efficiency heat recovery unit.
Coils enable you to control the temperature of the air supplied to the space.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- indoors or outdoors
- the «SAT BA» kit is required to control the coil from the TAC 4 controller on DFE units

Main characteristics

- 18 models of water coils (heating/cooling) in boxes equipped with stainless steel condensate collection trays (cold water coils only)
- 6 models with direct control 4 DX rows (evaporation/condensation) in boxes equipped with stainless steel condensate collection trays
- double-skin galvanised steel insulation 30 mm

Motorised 3-way valve kit, SAT BA and temperature sensors must be ordered as accessories

Accessories

Description	Variants
MOTORISED 3-WAY VALVE KIT 1.6 DFE/+Compact SAT+SENSOR	11090263
MOTORISED 3-WAY VALVE KIT 2.5 DFE/+Compact SAT+SENSOR	11090264
MOTORISED 3-WAY VALVE KIT 4.0 DFE/+Compact SAT+SENSOR	11090265
MOTORISED 3-WAY VALVE KIT 6.3 DFE/+Compact SAT+SENSOR	11090266
MOTORISED 3-WAY VALVE KIT 10 DFE/+Compact SAT+SENSOR	11090267
Condensate pump coil unit DFE	11090268

Air handling unit

11090248

Hot water coil 2 rows DFE+ 3000

Dimensional data

Variants	P (mm)			
11090248	678,5			

Technical drawings of the hot water coil showing front, side, and top views. Dimensions include P (width), H (height), L (length), and 4 x M8 mounting holes.

Airflow data

Variants	Loss of air pressure at 40/35 (Pa)	Loss of air pressure at 7/12 (Pa)	Loss of air pressure at 80/60 (Pa)	Loss of air pressure at DX 4° (Pa)	Coil power at 40/35 (kW)	Coil power at 7/12 (kW)	Coil power at 80/60 (kW)	Coil power at DX 4° (kW)
11090248	61	75	64	81	14,8/8,2	12,6/7,3	41,3/23,5	17,5/10,2

Heat recovery data

Variants	Delta temperature calculated at 100% and 50% of max. airflow at 40/35 (°C)	Delta temperature calculated at 100% and 50% of max. airflow at 7/12 (°C)	Delta temperature calculated at 100% and 50% of max. airflow at 80/60 (°C)	Delta temperature calculated at 100% and 50% of max. airflow DX 4° (°C)
11090248	15/16	09-oct	41/47	nov-13

Hydraulic data

Variants	Water flow calculated at max. flow rate at 40/35 (l/h)	Water flow calculated at max. flow rate at 7/12 (l/h)	Water flow calculated at max. flow rate at 80/60 (l/h)	Water flow calculated at max. flow rate at DX 4° (l/h)	Loss of fluid pressure at 40/35 (kPa)	Loss of fluid pressure at 7/12 (kPa)	Loss of fluid pressure at 80/60 (kPa)	Loss of fluid pressure at DX 4° (kPa)
11090248	2569	2162	1815	422,9	10,5	9,5	5	15,2

Curve

