Heat recovery ventilation unit

11023454 InspirAIR® Side 150 Classic LH

Heat recovery ventilation solution that matches the pace of occupant lifestyles.



InspirAIR® Side 150 Classic LH

PRODUCT BENEFITS

more purified air: up to 90% of bacteria, pollen and fine particles eliminated,
more design: pure and minimalist lines to blend in with the most demanding interiors,
more comfort: balances your indoor air while insulating from outdoor noise.

REGLEMENTATIONS AND COMPLIANCES

PV CE number : , Eurovent Certification no. : , Identification no. QB37 : , PassivHaus Institute Certification no. : , Technical Opinion no. : , Test standard : ,

Principles of operation

General and permanent ventilation of dwelling with heat recovery on exhaust air to pre-heat incoming air. Incoming air is purified with custom filters to ensure clean air throughout the dwelling.

Product description

Heat recovery ventilation solution with filtered incoming air and indoor air renewal without heat loss.

Fields of application

Multi-occupancy residential housing, Individual residential housing, New, Refurbishment, Non-residential buildings

Installation

- horizontal installation on ceiling or vertical on wall,
- condensate outlet connected to PVC Ø 32 mm duct,
- installation in heated space recommended.

Main characteristics

- material:PPE body and metal panels,
- configuration:
- left or right (2 versions),
- airflow:
- 150, 240, 370,
- = 100, 240, 370,= 1000/ bypage on sta
- 100% bypass as standard,Classic control keypad,
- Classic control keyp
- four modes:
- holiday,
- auto,boost,
- guest.

Heat recovery ventilation unit

$\begin{array}{l} 11023454 \\ \text{InspirAIR} \\ \hline \ensuremath{\mathbb{R}} \\ \hline \ensuremath{\mathbb{R}} \\ \hline \ensuremath{\mathbb{R}} \\ \hline \ensuremath{\mathbb{C}} \\ \hline \ensurema$

Contents of kits

InspirAIR® Side; 1 Mounting kit; 1 Connector D.160; 4 Classic embedded control keypad; 1 Siphon; 1 Dust filter; 1 Pollen filter; 1 Modem for AldesConnect® app; 0

Accessories

Désignations	References			
Finishing hatch InspirAIR® Side	11023321			
Wall cradle InspirAIR® Side	11023322			
BUS pre-heating coil 1.5 kW for DEE FLY and InspirAIR®	11023225			
Wired remote control 4-speed	11023334			


Consumables

Désignations	References			
Pollen filter for InspirAIR® Side 150	11023459			
Fine particle filter for InspirAIR® Side 150	11023460			
Bacteria filter InspirAIR® Side 150	11023461			
VOC filter for InspirAIR® Side 150	11023462			
Dust filter for InspirAIR® Side 150	11023469			

General data

References	Available filters	Type of exchanger	Type of motor
11023454	> pollen: - Coarse 65%, > particles: - ePM10 50%, > fine particles: - ePM1 0 85%, - ePM2.5 65%. > bacteria: - ePM2.5 95%, - ePM1 80%. > VOC: - ePM10 85%, - ePM2.5 65%.	Sensitive	EC

Dimensional data

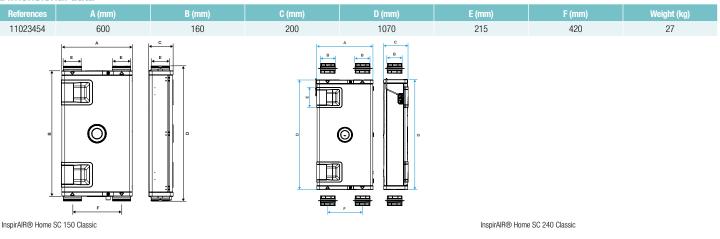

Airflow data

References	Airflow at max. speed (m ^s /h)
11023454	150






Heat recovery ventilation unit

$\begin{array}{l} 11023454 \\ \text{InspirAIR} \\ \hline \ensuremath{\mathbb{R}} \\ \hline \ensurema$

Electrical datas

References	Frequency (Hz)	Max. current (A)	Voltage (V)	Max. power		
11023454	50	1,2	230	135		
Regulatory data						
References Ventilation energy class – Average climate						
11023454	A					

Curve

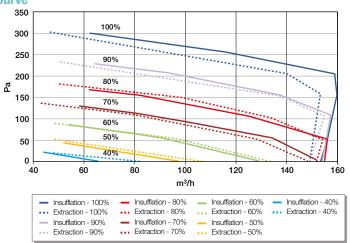

> Test conditions:

- Outdoor air = dry air at 5°C, Hr <20%.

- Indoor air = dry air at 25°C, HR <20%. (EN13141-7 and EN308)