

**Thermal insulation**

# 11023314

## InspirAIR® Side 370 Classic RH

Heat recovery ventilation solution that matches the pace of occupant lifestyles.



### PRODUCT BENEFITS

- more purified air: up to 90% of bacteria, pollen and fine particles eliminated,
- more design: pure and minimalist lines to blend in with the most demanding interiors,
- more comfort: balances your indoor air while insulating from outdoor noise.

### REGULATIONS AND COMPLIANCES

Identification no. QB37 ;  
Technical Opinion no. ;

### Principles of operation

General and permanent ventilation of dwelling with heat recovery on exhaust air to pre-heat incoming air. Incoming air is purified with custom filters to ensure clean air throughout the dwelling.

### Product description

Heat recovery ventilation solution with filtered incoming air and indoor air renewal without heat loss.

### Fields of application

Multi-occupancy residential housing, Individual residential housing, New, Refurbishment, Non-residential buildings

### Installation

- horizontal installation on ceiling or vertical on wall,
- condensate outlet connected to PVC Ø 32 mm duct,
- installation in heated space recommended.

### Reference arguments

Application:

- Centralised heat recovery ventilation and air purification solution for multi-occupancy residential buildings or individual houses,
- New builds or refurbishment projects.

Description:

- More purified air: up to 90% of pollutants filtered from your indoor air,
- More design: sleek, minimalist lines to blend in with the most demanding interiors.
- More comfort: tempers your indoor air while isolating you from outdoor noises.

### Main characteristics

- material:
  - PPE body and metal panels,
- configuration:
  - left or right (2 versions),
- airflow:
  - 150, 240, 370,
- 100% bypass as standard,
- Classic control keypad,
- four modes:
  - holiday,
  - auto,
  - boost,
  - guest.

## Thermal insulation

# 11023314

## InspirAIR® Side 370 Classic RH

### Contents of kits

- InspirAIR® Side; 1
- Mounting kit; 1
- Connector D.160; 0
- Classic embedded control keypad; 1
- Siphon; 1
- Dust filter; 1
- Pollen filter; 1
- Modem for AldesConnect® app; 0

### Accessories

Description	Variants
InspirAIR® Side 370 distribution unit	11023327
Finishing hatch InspirAIR® Side	11023321
Wall cradle InspirAIR® Side	11023322
Duct cover InspirAIR® Side 370	11023328
Ceiling penetration manifold for InspirAIR® Side 370	11023339
Duct cover 500 mm InspirAIR® Side 370	11023399
Duct finishing cover InspirAIR® Side 370	11023427
VEX40T internal preheating coil*	11023225
Wired remote control 4-speed	11023334

### Filters



Description	Variants
Dust filter for InspirAIR® Side 370	11023329
Fine particle filter for InspirAIR® Side 370	11023330
Bacteria filter InspirAIR® Side 370	11023332
Pollen filter for InspirAIR® Side 370	11023341
VOC filter for InspirAIR® Side 370	11023439

### General data

Variants	Available filters	Type of exchanger	Type of motor
11023314	<ul style="list-style-type: none"> <li>&gt; pollen:                             <ul style="list-style-type: none"> <li>- Coarse 65%,</li> </ul> </li> <li>&gt; particles:                             <ul style="list-style-type: none"> <li>- ePM10 50%,</li> </ul> </li> <li>&gt; fine particles:                             <ul style="list-style-type: none"> <li>- ePM1 0 85%,</li> <li>- ePM2.5 65%.</li> </ul> </li> <li>&gt; bacteria:                             <ul style="list-style-type: none"> <li>- ePM2.5 95%,</li> <li>- ePM1 80%.</li> </ul> </li> <li>&gt; VOC:                             <ul style="list-style-type: none"> <li>- ePM10 85%,</li> <li>- ePM2.5 65%.</li> </ul> </li> </ul>	Enthalpy	EC

### Dimensional data

Variants	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Weight (kg)
11023314	670	160	300	1150	215	420	34

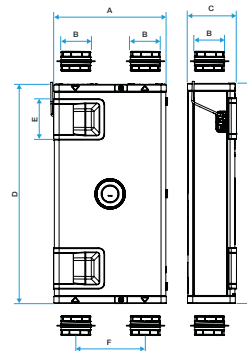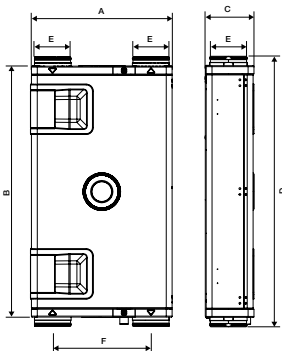

## Thermal insulation

# 11023314

## InspirAIR® Side 370 Classic RH

### Airflow data

Variants	Airflow at max. speed (m³/h)
11023314	370


### Electrical datas

Variants	Voltage (V)	Frequency (Hz)	Max. power	Max. current (A)
11023314	230	50	234	2

### Regulatory data

Variants	Ventilation energy class – Average climate
11023314	A

### Curve

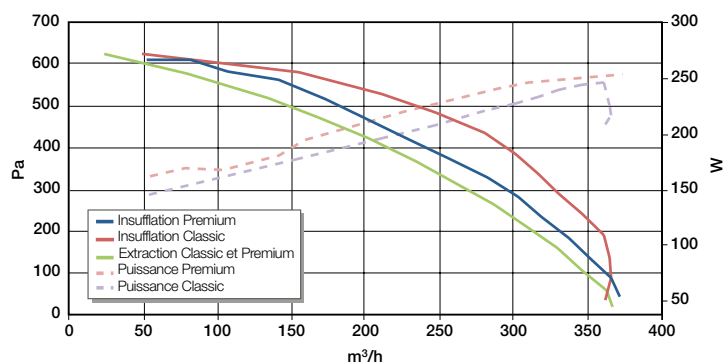

> Test conditions:

- Outdoor air = dry air at 5°C, Hr <20%.
- Indoor air = dry air at 25°C, HR <20%. (EN13141-7 and EN308)