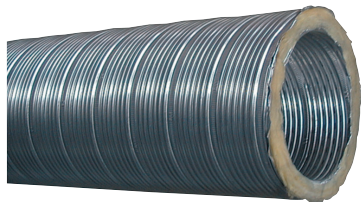


Rigid plastic duct**11091979****LG 3M ALFLEX ALU PHON.D400**

The soundproofed aluminium ALFLEX Alu duct connects a branch duct and terminal while providing noise attenuation.

**PRODUCT BENEFITS**

- flexible duct with built-in acoustic insulation,
- M0 fire certification.

Product description

ALFLEX Alu Soundproofed is a flexible, semi-rigid duct comprising two layers of aluminium foil enclosing 25 mm of glass wool insulation. It provides a soundproofed connection between a connector and a terminal.

Fields of application

Multi-occupancy residential housing, Individual residential housing, New, Refurbishment, Non-residential buildings

Installation

- fit female duct to male accessory,
- use sealant or RAF vulcanisable tape to ensure an airtight seal.

Reference arguments

Application:

- Final soundproofed connection from ducting to terminal
- Operating temperature: continuous: 200°C, occasional: 250°C

Description:

- Semi-rigid duct length 3 m - diameter 400 mm
- Alfex aluminium inside, 25 mm layer of glass wool and Alfex aluminium 'light' outside
- Supplied in 3 m straight lengths
- Bend radius: 3 D
- Class A1 as per decision of 21/11/2002

Rigid plastic duct

11091979

LG 3M ALFLEX ALU PHON.D400

Main characteristics

- material:
 - inner: ALFLEX Alu perforated,
 - outer: ALFLEX Alu,
 - thermal insulation: 25 mm glass wool.
- packaged in 3 m straight length,
- bend radius:
 - Ø 80 to 150 = 2 D,
 - Ø 160 to 250 = 2,5 D,
 - Ø 315 to 450 = 3 D.
- maximum operating temperature:
 - continuous: 200°C,
 - peak: 250°C.
- M0 fire certification (A1).

Accessories

Description	Variants
Pack of 25 multi-purpose collars Ø 60-540 mm	11090026
Pack of 50 clamp collars	11090031
CSF Ø 400 mm (pack of 10)	11094659

General data

Variants	Free air passage section (m²)	Maximum use temperature (°C)
11091979	0,5	250

Dimensional data

Variants	L (mm)	Ø (mm)	Bend radius	Weight (kg)
11091979	3000	400	3 D	17,1