


Slot diffuser**11002296**
LINED® EO Slim

The LINED® Slim Series is an aluminium linear frameless slot diffuser for use on air supply or return systems in non-residential buildings.



LINED SLIM EO FILTER HOLDER

PRODUCT BENEFITS

- identical aesthetic for air supply and extraction,
- slim frame for seamless integration in ceilings,
- compatible with the AldesArchitect® range.

Principles of operation

The LINED® Slim diffuser is installed in a ceiling with a connection plenum. The air supply model delivers adjustable air diffusion using a dirigible deflector in the centre of each slot. The opening extraction model allows the use of a filter.

Product description

The LINED® Slim is an aluminium linear slot diffuser for use on air supply or extraction circuits in ventilation and air conditioning systems in commercial buildings. The diffuser has been designed without a frame to integrate seamlessly with metal ceilings. This diffuser is available with up to 8 slots and in dimensions of 300 to 2000 in increments of 5 mm. The opening model is limited to 1500 mm. The slots are 25 mm wide. Installed directly on the ceiling using a plenum. The diffuser body is made of anodised aluminium painted RAL 9010 white matt 30% or other RAL colours, or the AldesArchitect® finish.

Fields of application

Non-residential buildings

Installation

The LINED® Slim diffuser is installed on the ceiling using a plenum, with choice of attachment method depending on the plenum and type of ceiling.

Reference arguments

• Lined Slim EO aluminium slot diffuser for return. • 3 to 5 slots of 25 mm. • Extruded aluminium body and deflectors. • Hinged opening core for access to G3 filter (ISO coarse 60%) located in the connection plenum. • Anodised aluminium, natural satin or epoxy paint finish or AldesArchitect colours. • Frameless. • Concealed attachment to plenum, either adjustable and accessible below the diffuser (type S3), or directly using self-tapping screws on the sides of the plenum (type S2). • Single-piece lengths: from 300 to 1500 mm (possibility of linear strips beyond this dimension). • Accessory: connection plenum.

Main characteristics

- adjustable diffusion with dirigible deflector in centre of each slot,
- vertical diffusion possible,
- aluminium body and deflector,
- finishes:
 - standard RAL 9010 white,
 - AldesArchitect® finish,
- slot width 25 mm,
- LINED® Slim S air supply model with dirigible deflectors,
- LINED® Slim E extraction model with fixed deflectors,
- LINED® Slim EO extraction model with fixed deflectors and opening central core for access to filter in connection plenum:
 - hinged-mounted core, push-push close,
 - available from 3 slots and more,
 - maximum length 1500 mm.
- concealed attachment to plenum:
 - adjustable and accessible from under the diffuser (type S3), or
 - directly by self-tapping screw on sides of plenum (type S2).
- the S2 attachment method is recommended for suspended ceilings and is not compatible with fixed ceilings (plaster or BA13).

Slot diffuser

11002296
LINED® EO Slim

Slot diffuser

11002296 LINED® EO Slim

Supplementary characteristics

- accessories:
 - galvanised steel connection plenum with side branch connection, standard or insulated version,
 - G3 M1 filter,
 - spade damper fitted in plenum branch connection.

Accessories


Désignations	References
Plenum LINED Slim	11002136

Consumables


Désignations	References
G3 filter M1 LINED® Slim plenum	11003258

Options

RAL DIF
RAL1
RAL2
RAL4

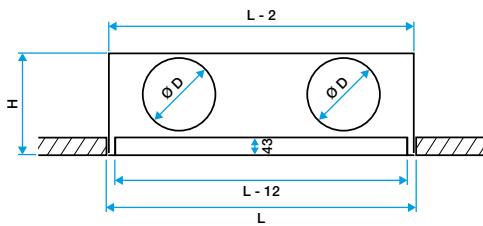


Lined S Slim avec plénum. Fixation S2 ou S3

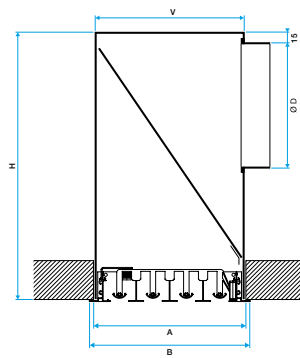


Lined E Slim avec plénum.
Fixation S2

Diffuseur avec fixation S2 ou S3


Installation visual 1

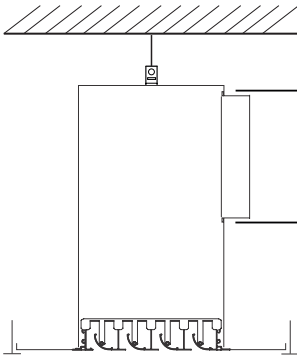


Diffuseur de soufflage avec fixation S2

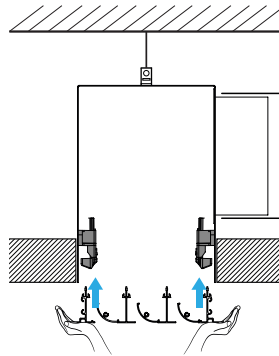

Diffuseur de soufflage avec fixation S3

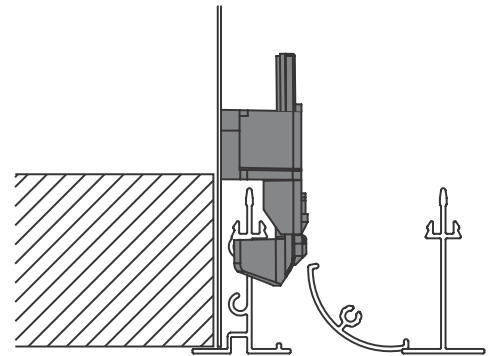

Gros plan fixation S3



-Gros plan fixation S3 avec tournevis

Slot diffuser

11002296
LINED® EO Slim