


## Façade outlet

# 11069022

## MOTOR DAMPER ISOL. VEX570



### Product description

The dampers are used to isolate the air inlet and outlet when the unit is not operational, to prevent air entering the building. Their motors are controlled directly by the unit control.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation


- supplied in pack of 2 with:
  - pre-wired servomotors,
  - an "RG" link cable,
  - a junction box,
  - self-tapping screws,
  - M8 screws to attach the damper in the unit opening frame,
  - a self-adhesive EPDM seal section 5x10 mm for application on the damper flange to ensure structural air tightness.
  - compatible with the rectangular-circular adapters and non-insulated flexible sleeves.

### Main characteristics

- galvanised steel frame and aluminium dampers,
- class B airtight performance for casing, dampers class 2 in negative pressure and class 3 in positive pressure as per standard NF EN 1751,
- IP54 (on/off) servomotor with return spring used to close dampers and isolate ducts if the power is cut off,
- connection cable to controller supplied.

### Dimensional data

| Variants | P (mm) | Weight (kg) |
|----------|--------|-------------|
| 11069022 | 130    | 17,27       |

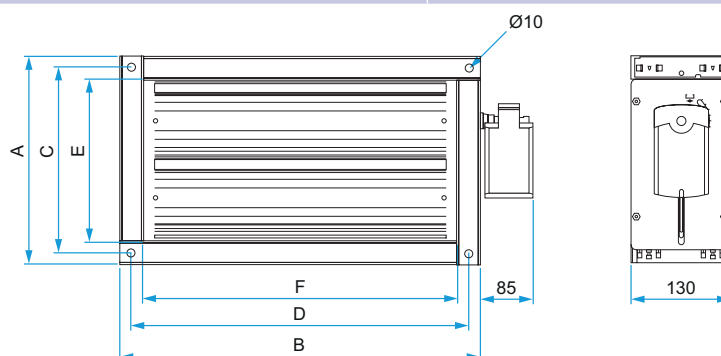

### Electrical datas

| Variants | Frequency (Hz) |
|----------|----------------|
| 11069022 | 50/60          |

Façade outlet

11069022  
MOTOR DAMPER ISOL. VEX570

Regulatory data

| Variants | Fire protection rating |
|----------|------------------------|
| 11069022 | C                      |