Centralised vacuum system

11016095 MR Mono HP Ø 250 - 1000 m3/h

The MR Mono is an airflow regulator which ensures a stable high-pressure airflow to control IAQ, comfort and energy savings in a room.



PRODUCT BENEFITS

- ideal for high pressure ducting: controls up to 650 Pa.
 low noise level,
- easy and fast to install: multiple positions (horizontal, vertical, any angle).

Principles of operation

Using its membrane, the MR Mono High Pressure maintains a constant airflow in the air supply circuit or return circuit, over a range of high pressures, whatever the pressure variation within this range.

Product description

The MR Mono High Pressure is an airflow regulator which guarantees a stable airflow over a range of high pressures, to prevent over-consumption due to excess airflow, ensure good IAQ and a high level of comfort. its membrane technology ensures low noise levels.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- installed directly in the duct,
- installation direction indicated on component,
- horizontal or vertical installation at any angle,
- reserve distance with a grille, T-piece or bend: 1D on extract and 3D on air supply.

Main characteristics

- plastic body (M1 fire protection rating),
- silicone control membrane,
- support and airtight properties using double-lip elastomer seal,
- operating pressure: 150-650 Pa,
- tolerance in airflow over operating range: +/- 10 %,
- operating temperatures: -10°C to +60°C

Accessories

Description	Variants
Window sleeve Ø 250 mm	11013126

General data

Variants	Airflow accuracy	
11016095	+/- 10%	






Centralised vacuum system

11016095 MR Mono HP Ø 250 - 1000 m3/h

Dimensional data

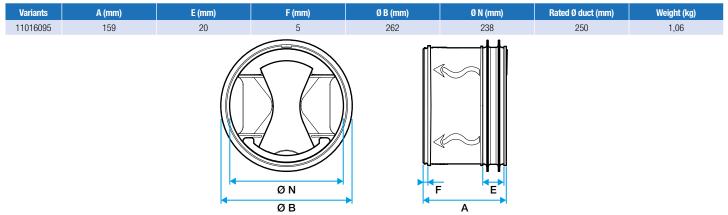

Airflow data

Variants	Airflow (m³/h)	Pressure range (Pa)
11016095	1000	150-650

Regulatory data

Variants	Fire protection rating	
11016095	M1	

Installation

