

11094643

OCTA D1000 sealed

The sealed Octa sound attenuator strongly attenuates mid-frequency acoustic propagation in circular ducting, with low leakage.



Octa diamètre 1000 à joint

PRODUCT BENEFITS

- high-performance acoustic attenuation,
- energy savings: low pressure losses,
- energy savings: very low leak rate (class D airtight).

Principles of operation

The interior of the sealed Octa is lined with mineral wool coated with glass mat to attenuate noise.

Product description

The sealed Octa circular sound attenuator strongly attenuates noise transmitted in the ventilation ducting and therefore ensure acoustic comfort inside commercial and multi-occupancy residential buildings while delivering good airtight performance. A wide range of diameters from Ø 125 to Ø 1000 mm .

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- directly inserted between two circular ducts.

Reference arguments

- External casing made of solid galvanised steel or aluminium.
- Internal casing made of slotted galvanised steel or aluminium.
- Sealed connection rings from Ø 125 to Ø 630 mm. Standard connection rings for larger diameters.
- Soundproofing: mineral wool + glass mat.
- M0 fire rating.

Main characteristics

- external casing made of solid galvanised steel,
- internal casing made of perforated galvanised steel,
- sealed connection rings,
- sound-proofing: mineral wool + glass mat,
- M0 fire certification, or A1 under Euroclass ratings,
- version tested to 400°C - 2 hours on request.
- Class D airtight properties in accordance with EN 12237.

General data


References	Thickness of insulation (mm)	Insulation material
11094643	100	Mineral wool

11094643

OCTA D1000 sealed

Dimensional data

References	F (mm)	G (mm)	Ø d (mm)	Ø D (mm)	Weight (kg)
11094643	1200	1400	1000	1250	110

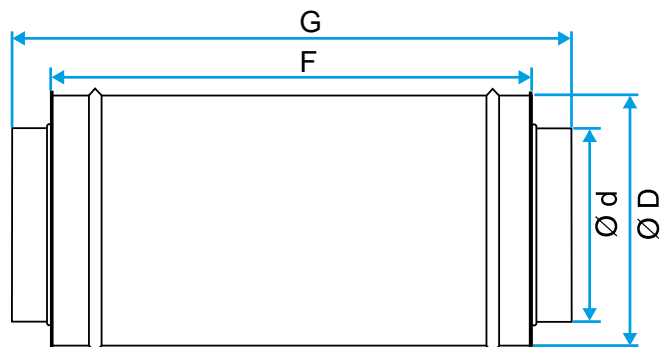

Octa

Regulatory data

References	Fire protection rating
11094643	A1