


11027173

OPTIFLEX® metal unit 20 connections for circular ducts with D160 inlet Floor

OPTIFLEX metal distribution units with circular connections can be used for both supply and exhaust air.

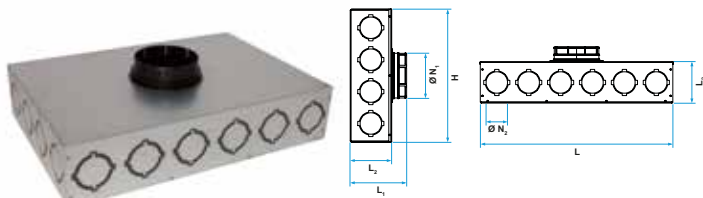

Distribution unit OPTIFLEX 20 connections

Dimension distribution unit OPTIFLEX 20 connections

PRODUCT BENEFITS

- Class B air tightness,
- Controlled pressure loss,
- Small footprint for installation in technical ceilings.

Product description

The OPTIFLEX metal distribution unit range comprises four units:

- for wall and ceiling installations: 1 unit with 16 connections and 1 unit with 20 connections depending on the size of the dwelling.
- for slab installations: 1 unit with 11 connections and 1 unit with 20 connections depending on the size of the dwelling.

All units have a removable hatch for unit maintenance and duct cleaning.

OPTIFLEX distribution units are made of sheet metal with no sharp edges and are soundproofed to class B.

Fields of application

Multi-occupancy residential housing, Individual residential housing, New

Installation

- Attachment brackets are supplied with each unit (2 brackets + screws for the 16-connection model and 4 brackets for the 20-connection model).
- Unused connections do not need to be plugged.
- The choice of D75 or D90 unit connections depends on the diameter of the duct to be connected.
- Easy maintenance with a maintenance hatch accessible without tools or adhesives.

Curve

