

Connector**11098303****PEP GALVA Branch piece+seal - Ø 160 mm**

The PEP sealed flat 90° branch connector makes a right-angle branch on a galvanised oblong or rectangular duct.



Sealed flat right angle connector

PRODUCT BENEFITS

- easy and quick to install,
- aesthetic ducting.

Product description

The PEP sealed flat 90° branch connector makes a right-angle branch on a galvanised oblong or rectangular duct.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- when installing, pay special attention to pressures losses, noise and leaks that may be generated
- prioritise the use of factory-produced sealed T-pieces,
- to slot in or remove an accessory, rotate it slightly in the duct,
- as an airtight junction is automatically provided by the ALDES seal, no need to use sealant or adhesive tape,
- for vertical installations especially, the use of self-tapping screws remains recommended,
- time savings in relation to ducting with standard accessories is in the range of 20 % (at least 15 to 30 seconds saved per junction for diameters 125 to 315, or at least 30 to 60 seconds saved for each accessory in these diameters),
- ALDES sealed accessories are specially designed to ensure easy connection / disconnection. The ALDES range offers class C airtight performance and low connection torque.

Reference arguments

Application:

- Serves to change direction of oblong or rectangular flat ducting by 90° diameter 160 mm

Description:

- Sealed flat connector galvanised steel diameter 160 mm

Main characteristics

- available in diameters from 125 to 560,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- all junctions are crimped,
- temperature range: - 30°C à + 100°C,
- resistant to ageing (• 30 years), UV and ozone,
- M0 fire certification,
- not advised for class C airtight performance.


Connector

11098303

PEP GALVA Branch piece+seal - Ø 160 mm

Dimensional data

| References | Ø (mm) |
|------------|--------|
| 11098303 | 160 |

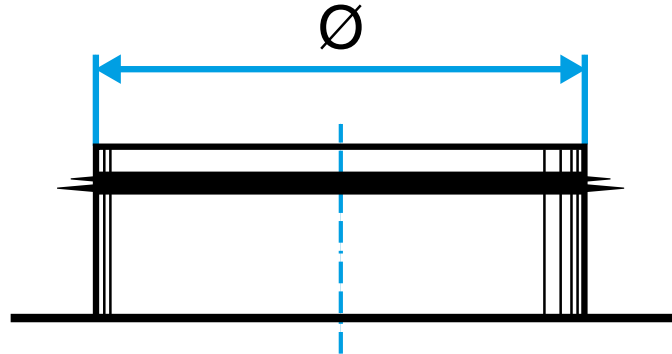

Dimensional drawing Sealed flat 90° branch connector

Regulatory data

| References | Fire protection rating |
|------------|------------------------|
| 11098303 | M0 |