

Collective static heat exchanger

11003329

PLENUM RE610K 675x675 D250 PC

Product description

This plenum is used on air supply or extract via the ALD 610K square diffuser.

Fields of application

New, Refurbishment, Non-residential buildings

Installation


- concealed attachment of diffuser to plenum using fixed clips,
- assembly attached to concrete slab using tabs on plenum.

Main characteristics

- galvanised steel,
- connector on side,
- options:
 - G2 or G3 flat filter for extraction (M1 fire certification),
 - adjustment damper fitted to plenum with access via diffuser,
 - plenum insulated on 2 or 5 sides (PE foam M1),
 - additional connector.

Dimensional data

Variants	H (mm)	L (mm)
11003329	635	635

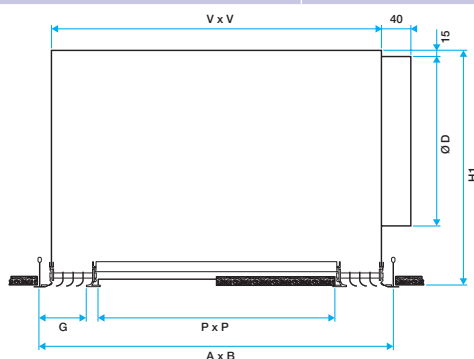

Dimensions of RE 610 plenum with diffuser