

**Connector****11097369**  
**POP GALVA FLAT CONNECTR - D500**

The POP angled branch connector makes a 45° angle branch on a galvanised oblong or rectangular duct.



Piquage Oblique sur Plat 45°

**Product description**

The POP angled branch connector makes a 45° angle branch on a galvanised oblong or rectangular duct.

**Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

**Installation**

- when installing, pay special attention to pressures losses, noise and leaks that may be generated,
- easy to assemble using interlocking parts: ducts are female in design, accessories are male,
- airtight seal formed using sealant and/or adhesive tape,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

**Reference arguments**

Application:

- Serves to add a 45° bend diameter 500 mm to oblong or rectangular flat ducting.

Description:

- Angled flat connector galvanised steel diameter 500 mm

**Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

**Dimensional data**

References	Ø (mm)
11097369	500

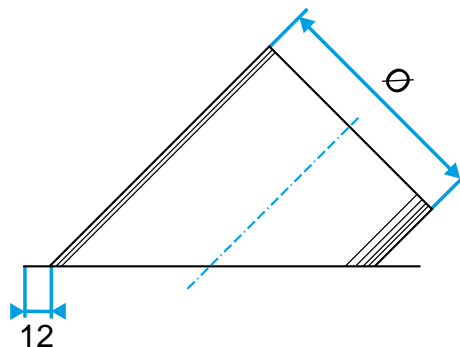


Schéma d'encombrement Piquage Oblique sur Plat 45°

Connector

11097369

POP GALVA FLAT CONNECTR - D500

Regulatory data

References	Fire protection rating
11097369	M0