Connector



The POP angled branch connector makes a 45° angle branch on a galvanised oblong or rectangular duct.



Piquage Oblique sur Plat 45°

Product description

The POP angled branch connector makes a 45° angle branch on a galvanised oblong or rectangular duct.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings Installation

- when installing, pay special attention to pressures losses, noise and leaks that may be generated,
- easy to assemble using interlocking parts: ducts are female in design, accessories are male,
- airtight seal formed using sealant and/or adhesive tape,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

• Serves to add a 45° bend diameter 710 mm to oblong or rectangular flat ducting.

Description:

11097372

• Angled flat connector galvanised steel diameter 710 mm

Main characteristics

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,

• M0 fire certification.

Dimensional data

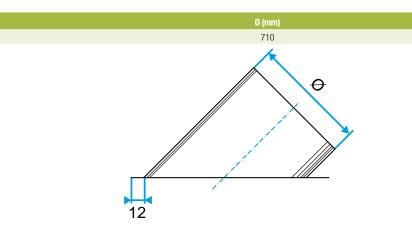


Schéma d'encombrement Piquage Oblique sur Plat 45°





Connector

11097372 POP GALVA FLAT CONNECTR - D710

Regulatory data

References 11097372

MO