

Fitting accessory

11090049

Perforated tape 17 mm, roll of 25 m

**Product description**

Perforated tape is a quick suspension method for ducting elements.

Fields of application

Multi-occupancy residential housing, Individual residential housing, New, Refurbishment, Non-residential buildings

Installation

0

Reference arguments

Application:

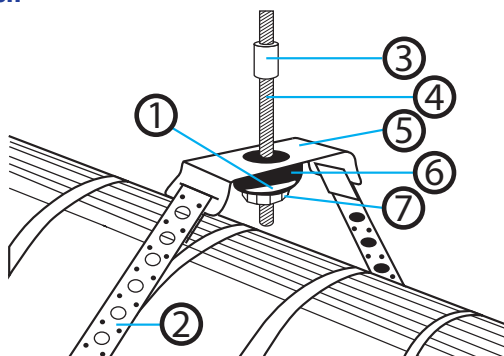
- Suspension of ducting system components

Description:

- Perforated galvanised steel strip 0.6 mm thick - maximum admissible load (3 m bar): Ø500 mm

Main characteristics

- perforated tape 0.6 mm thick width 17 mm:
 - max. working load (3 m bar): Ø 500 mm.
- perforated tape 0.8 mm thick width 25 mm:
 - max. working load (3 m bar): Ø 560 mm.

Installation

Installation drawing for perforated strip