


## Special diffuser

11002197

Plenum LINED Combined

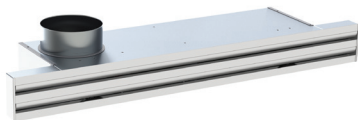

## Product description

This double plenum delivers combined air supply or extract via the LINED® Combined slot diffuser.

## Fields of application

New, Refurbishment, Non-residential buildings

## Installation

- concealed attachment of diffuser to plenum using screws and clips, accessible under the diffuser,
- assembly attached to concrete slab using tabs on plenum.

## Reference arguments

• Plenum for Lined Combined slot diffuser. • Double compartment for very low leakage rate (<5%) on air supply/return to minimise energy losses. • Options: soundproofing or thermal and acoustic insulation (M1 fire rating), G3 filter with M1 fire rating (ISO Coarse 60%), damper, plenum length shorter than diffuser, connection diameters, oblong connection, supplementary connection, height.

## Main characteristics

- galvanised steel,
- options:
  - number and size of connections,
  - damper,
  - thermal+acoustic insulation or soundproofing,
  - plenum supplied fitted to diffuser,
  - plenum shorter than diffuser,
  - filter.

## Accessories

Description	Variants
Bag of 100 F3 clips	21080260

## Options

ACOU
ACOU2
FILTRA
MONT
PIQAN3
PIQPLUS3_2
REGIS4
THER
THER2

Special diffuser

## 11002197 Plenum LINED Combined

### Dimensional data

Variants	H (mm)	L (mm)
11002197	75-390	500-2000

