

Rooftop chamber

11003343

R-RE613K 600x600 D250 PLENUM COMBINED

**Product description**

Double plenum for combined air supply and extraction via the ALD610K Combined square diffuser.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- concealed attachment of diffuser to plenum using fixed clips,
- supplied pre-assembled,
- assembly attached to concrete slab using tabs on plenum.

Main characteristics

- double plenum offering simultaneous air supply and extraction,
- galvanised steel,
- two opposite connections,
- options:
 - G2 or G3 flat filter for extraction (M1 fire certification),
- insulated on 5 sides (M1 PE foam),
- air supply and extraction connections at 90°.

Options


base
IF5
ISOL3
LM
PIQK1
FILTR8

Rooftop chamber

11003343
R-RE613K 600x600 D250 PLENUM COMBINED

Dimensional data

Variants	H (mm)	L (mm)
11003343	560	560

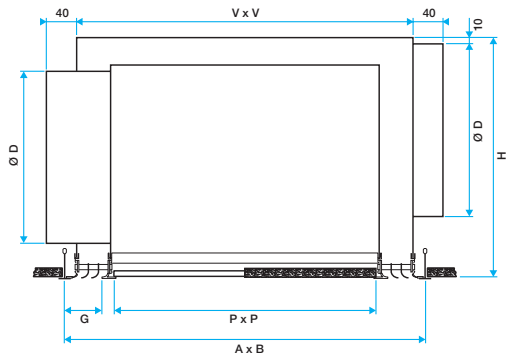

Dimensions of R-RE plenum with ALD diffuser fitted