

**Airflow control**

## 11095503 RCC ALU - D160/125

The RCC aluminium joins two aluminium ducts of different diameters together.



### PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

### Product description

The aluminium concentric conical reducer connects two aluminium ducts of different diameters together.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Connects 160 mm circular duct to 125 mm circular duct in a multi-occupancy residential gas CMEV system

Description:

- Concentric conical reducer aluminium diameter 160/125 mm

### Main characteristics


- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- MO fire certification.

### General data

Variants	Main material
11095503	Aluminium

### Dimensional data

Variants	Ø A (mm)	Ø B (mm)
11095503	160	125

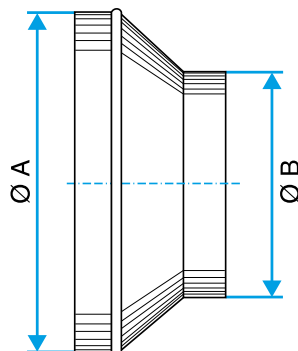

Airflow control

11095503  
RCC ALU - D160/125

Regulatory data

Variants	Fire protection rating
11095503	M0