

Connector

11095507

RCC ALU - D200/125

The RCC aluminium joins two aluminium ducts of different diameters together.



Réduction Conique Concentrique en aluminium

PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

Product description

The aluminium concentric conical reducer connects two aluminium ducts of different diameters together.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Connects 200 mm circular duct to 125 mm circular duct in a multi-occupancy residential gas CMEV system

Description:


- Concentric conical reducer aluminium diameter 200/125 mm

Main characteristics

- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- M0 fire certification.

Dimensional data

References	Ø A (mm)	Ø B (mm)
11095507	200	125

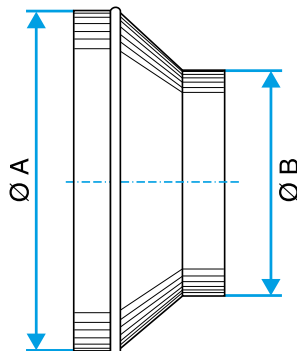

Dimensional drawing aluminium Concentric Conical Reducer

Regulatory data

References	Fire protection rating
11095507	M0

Connector

11095507
RCC ALU - D200/125