

## Airflow control

# 11095522

## RCC ALU - D400/315

The RCC aluminium joins two aluminium ducts of different diameters together.



### PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

### Product description

The aluminium concentric conical reducer connects two aluminium ducts of different diameters together.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Connects 400 mm circular duct to 315 mm circular duct in a multi-occupancy residential gas CMEV system

Description:

- Concentric conical reducer aluminium diameter 400/315 mm

### Main characteristics


- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- MO fire certification.

### General data

| Variants | Main material |
|----------|---------------|
| 11095522 | Aluminium     |

### Dimensional data

| Variants | Ø A (mm) | Ø B (mm) |
|----------|----------|----------|
| 11095522 | 400      | 315      |

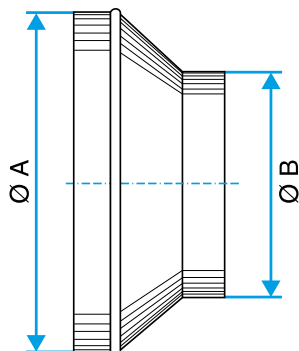

Airflow control

11095522  
RCC ALU - D400/315

Regulatory data

| Variants | Fire protection rating |
|----------|------------------------|
| 11095522 | M0                     |