

Airflow control

11095548 RCC ALU - D450/400

The RCC aluminium joins two aluminium ducts of different diameters together.



PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

Product description

The aluminium concentric conical reducer connects two aluminium ducts of different diameters together.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Connects 450 mm circular duct to 400 mm circular duct in a multi-occupancy residential gas CMEV system

Description:

- Concentric conical reducer aluminium diameter 450/400 mm

Main characteristics


- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- MO fire certification.

General data

| Variants | Main material |
|----------|---------------|
| 11095548 | Aluminium |

Dimensional data

| Variants | Ø A (mm) | Ø B (mm) |
|----------|----------|----------|
| 11095548 | 450 | 400 |

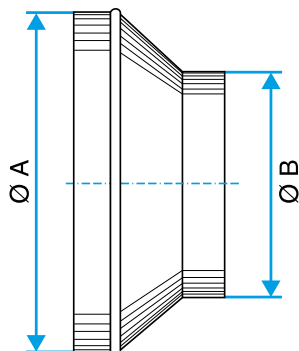

Airflow control

11095548
RCC ALU - D450/400

Regulatory data

| Variants | Fire protection rating |
|----------|------------------------|
| 11095548 | M0 |