

## Connector

# 11095547

## RCC ALU - D500/450

The RCC aluminium joins two aluminium ducts of different diameters together.



Réduction Conique Concentrique en aluminium

### PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

### Product description

The aluminium concentric conical reducer connects two aluminium ducts of different diameters together.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Connects 500 mm circular duct to 450 mm circular duct in a multi-occupancy residential gas CMEV system

Description:


- Concentric conical reducer aluminium diameter 500/450 mm

### Main characteristics

- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- M0 fire certification.

### Dimensional data

References	Ø A (mm)	Ø B (mm)
11095547	500	450

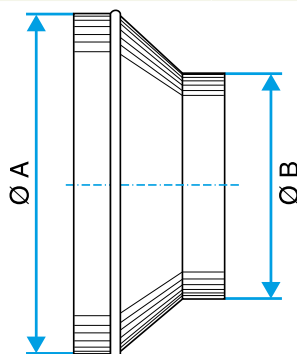

Dimensional drawing aluminium Concentric Conical Reducer

### Regulatory data

References	Fire protection rating
11095547	M0

Connector

**11095547**  
RCC ALU - D500/450