
## Connector



The RCO oblong concentric reducer joins two galvanised ducts of different diameters together.



Oblong Concentric Reducer

# PRODUCT BENEFITS

small size for high airflow, good airtight performance and controlled pressure losses, easy to install and maintain (no inaccessible corners).

## **Product description**

The RCO oblong concentric reducer joins two galvanised ducts of different diameters together.

## **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

## **Reference arguments**

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- Oblong concentric reducer used to connect two oblong ducts of different sizes

#### Description:


- RCO oblong-oblong concentric reducer, galvanised steel
- Length 450 mm x height 100 mm Length 360 mm x height 80 mm

## **Main characteristics**

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,

#### • M0 fire certification.

#### **Dimensional data**

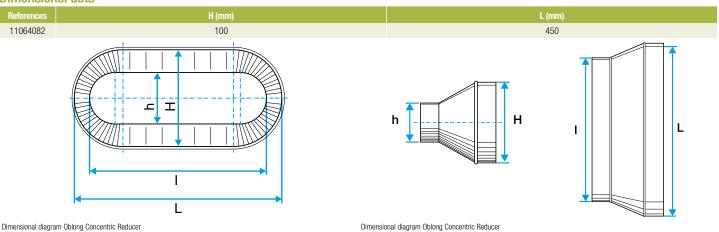

## Connector

11064082 RC0 GALVA - 450x100 / 360x80

**Regulatory data** 

References 11064082

M0