Connector

11066444 RCOC GALVA - 325x130 - D250

The RCOC oblong / circular concentric reducer connects an oblong duct to a circular duct.



Oblong Cylindrical Concentric Reducer

PRODUCT BENEFITS

Product description

The RCOC oblong / circular concentric reducer connects an oblong duct to a circular duct.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- Cylindrical oblong concentric reduction used to connected oblong ducting diameter 325 x 130 mm and circular ducting diameter 250 mm


Description:

- RCOC cylindrical oblong concentric reducer, galvanised steel
- Length 325 mm x height 130 mm diameter 250 mm

Main characteristics

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

Dimensional data

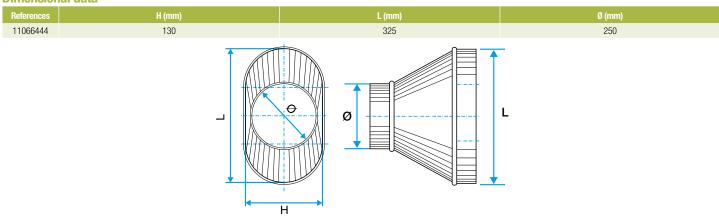

Dimensional drawing Oblong Cylindrical Concentric Reducer





OBLONG GALVANISED DUCTWORK

Connector

11066444 RCOC GALVA - 325x130 - D250

Regulatory data

References	Fire protection rating
11066444	M0



