

Counterflow heat exchanger

11002950

RE780 PLENUM / SF785-786-775

Product description

This plenum is used on air supply via swirl diffusers SF 775, SF 785 and SF 786.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- concealed attachment to diffuser using screws on side or visible attachment using central screw and bridge,
- assembly attached to concrete slab using tabs on plenum.

Main characteristics

- galvanised steel,
- connector on side,
- options:
 - dimensions,
 - F0 concealed screw attachment on side,
 - F7 visible centre screw + bridge attachment,
 - special depth,
 - special connectors,
 - insulation 2 or 5 sides.

Options


F7
IF2
IF5
O
PIQ3
PIQ4
PIQ5

Counterflow heat exchanger

11002950
RE780 PLENUM / SF785-786-775

Dimensional data

Variants	H (mm)	L (mm)
11002950	590	590

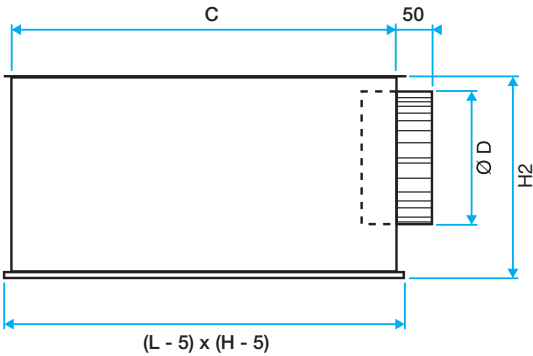

Dimensions of RE780 plenum with diffuser