



The female connector connects two galvanised accessories together.



Female connector

Product description

The female connector connects two galvanised accessories together. **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

• Connects two accessories of same diameter together in non-residential and multi-occupancy residential systems

Description:


• Galvanised steel connector diameter 160 mm

Main characteristics

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

Dimensional data

11093065

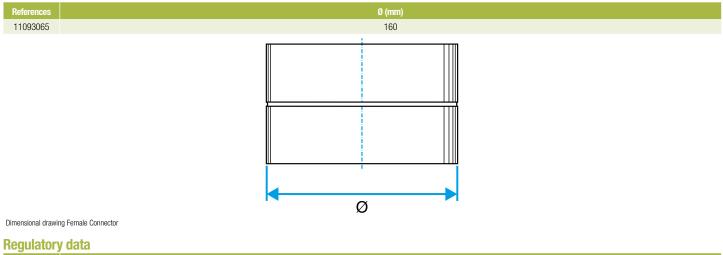

Fire protection rating

M0

Rigid galvanised ductwork, Aluminium and Special



