



The RFO oblong female connector connects two galvanised oblong accessories together.



Raccord Femelle Oblong

PRODUCT BENEFITS

small size for high airflow,
good airtight performance and controlled pressure losses,
easy to install and maintain (no inaccessible corners).

Product description

The RFO oblong female connector connects two galvanised oblong accessories together.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- Connection between two oblong accessories of same dimensions

Description:


- Oblong female connector made of galvanised steel.
- Length 515 mm and height 215 mm.

Main characteristics

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,

• M0 fire certification.

Dimensional data

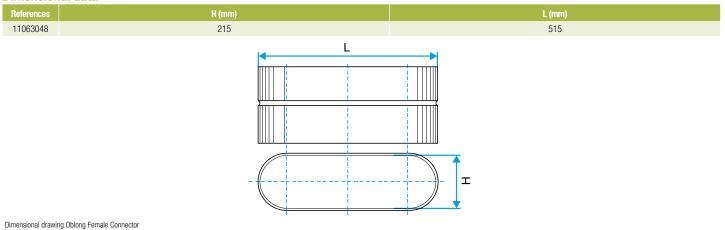





Connector

11063048 RF0 GALVA - 515x215

Regulatory data

References 11063048

MO